
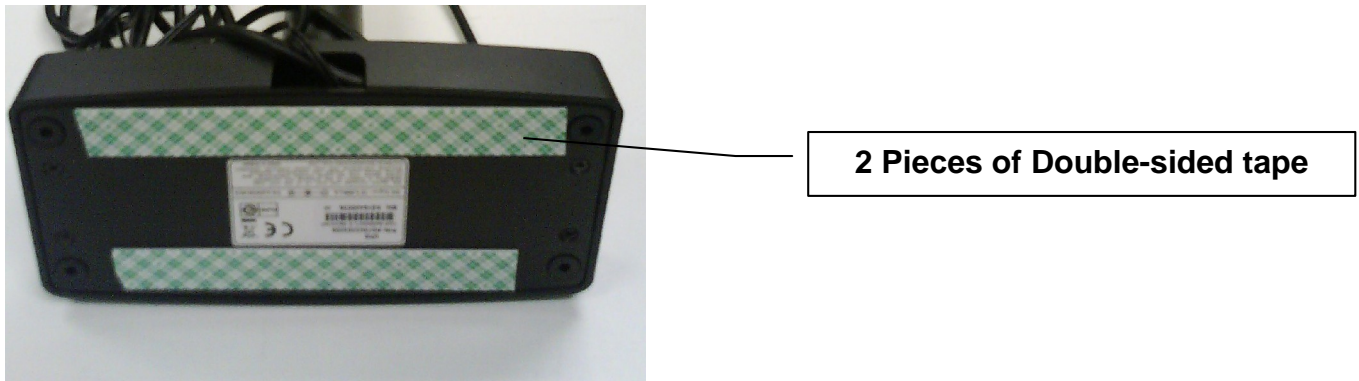


# CT Retail Systems

To: Store Manager


Please call 203-283-9477 to schedule an appointment for phone support to install your new customer pole display. The installation will require approximately 15 minutes per register.

Verify the following is included in your shipment. (If you have 2 registers you should have 2 of each pieces listed):

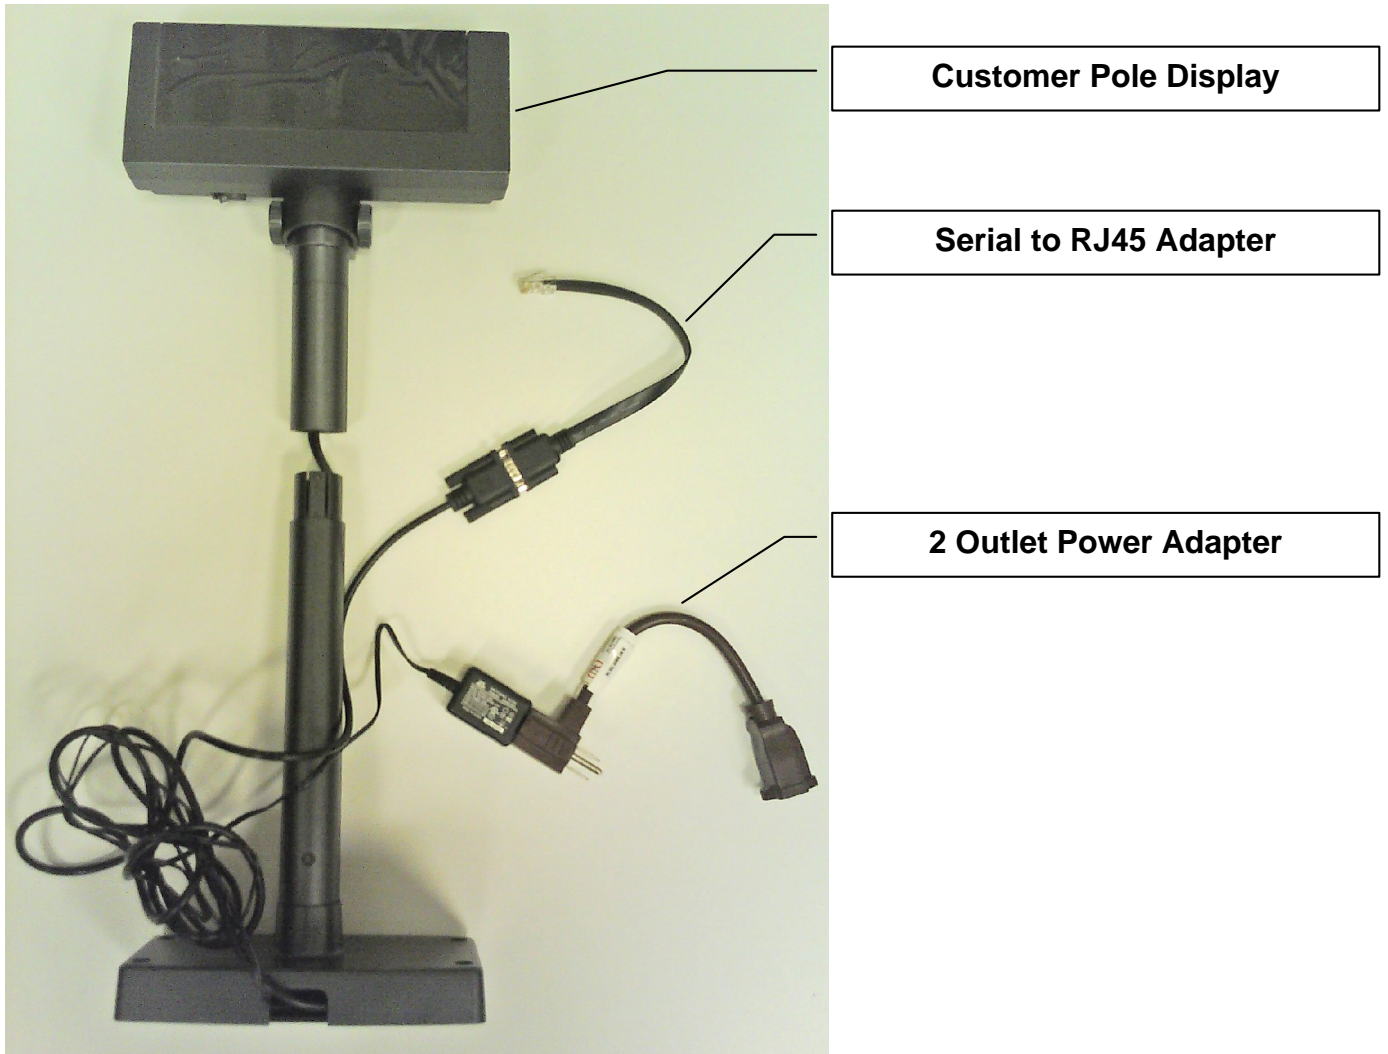

## Instructions:

1. Turn off the Breeze, position the display in a horizontal position then place the breeze on it's left side.

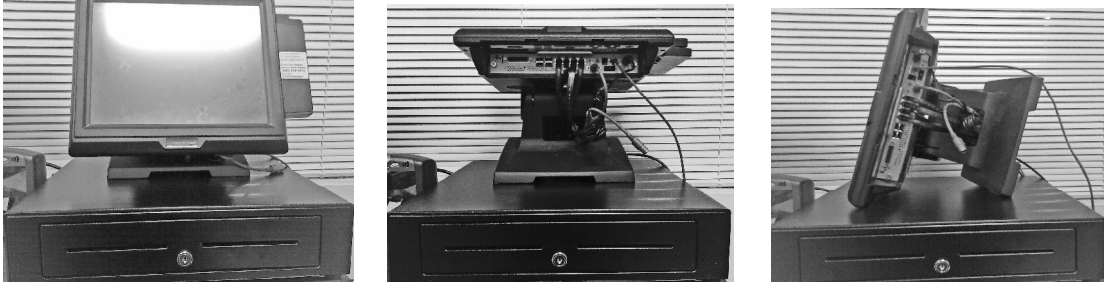


2. Unplug existing Serial to RJ45 Adapter currently plugged in COM3 and plug in new Serial to RJ45 Adapter. Route the cabling underneath to the inside of the Breeze Base. Position the Breeze back to it's normal position. Do not turn it on yet.



Pole display data cable

COM3

3. Unplug the existing power cord that is connected in the 6th position (US Robotics power adapter) from the Minuteman UPS. Plug the US Robotics adapter into the new 2 Outlet Power Adapter, then plug this new cord into the UPS. If your location has 2 registers, one of them will not have a US Robotics Power Adapter.

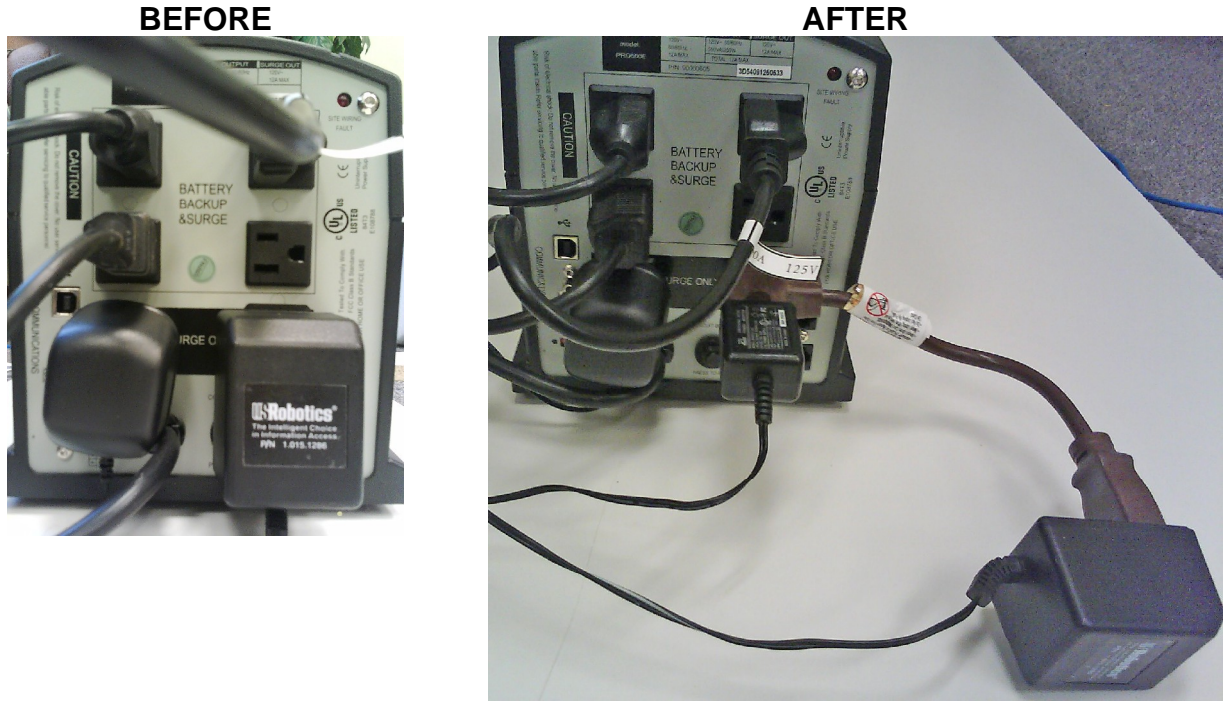

4. Assemble the Pole Display, attach the bottom and top poles together.

**5. DO NOT APPLY TAPE UNTIL POSITION IS LOCATED AND DISPLAY IS TESTED.** Position the Customer Pole Display on the counter so that the customers can conveniently read it. Be 100% sure that this is the right position for this display before utilizing the double-sided tape for permanent installation. **DO NOT APPLY TAPE YET, PROCEED TO NEXT STEP..**

6. Test the display, Turn on the Breeze, log in, then be sure the display reads the date and time.



7. Apply the tape, be sure the area is clean and dry

## END OF INSTRUCTIONS